

# LED Panel

Indoor P3 Panel

PROD CODE  
LA - PAP3-50IN

# LEDArts



## SPECIFICATIONS



Pixel	SMD:RGB Tricol LEDs
Pixel Pitch	3.9mm
Resolution	128 Dots x 128 Dots
Refresh Frequency HZ	≥ 1920Hz
LED Life	>100,000 hrs.
Recommended viewing distance	3 - 100mtrs
Viewing Angle ( H/V )	150° / 120°
Brightness ( cd/m2 )	1000±10%
Control System	NOVA Star
Control Options	Via Video Processor ( NovaStar recommended )
Data Processor	On board Receiver Card
Data Connection	Cat5 : RJ45 Chassis Mount Connector on Data Input and Data Output
Power Connection	Neutrik PowerCON Chassis Mount Connector on Power Input and Power Output
Power	AC Power 90v - 264v 50/60Hz
Power Consumption	120watts Max. - 40watts Average.
Screen Assembly	Quick - Lock System
Dimensions	W 500mm x H 500mm x D 73mm
Weight	5.7 kg
IP Rating ( Front/Back )	IP60 / IP50 - Indoor use
Approval	CE Certification, TUV, CCC, ISO

The LEDArts range of indoor Panels offer superior design and picture quality.

Our LED panels are available in a range of pixel pitches that will suit any viewing distance.


The unique cabinet design not only makes this the lightest panel in the world but also gives you the ability to create a variety of screen layouts, making this a very versatile panel indeed.

Suitable for Schools,  
Sporting events,  
Festivals, Concerts  
Advertising, TV Stations  
Perimeter signage,  
Corporate events,  
Exhibitions, etc.

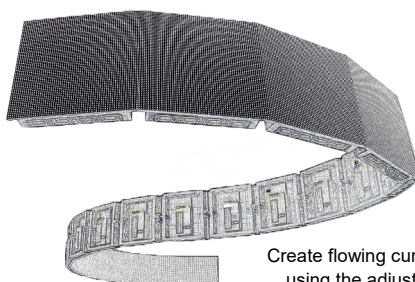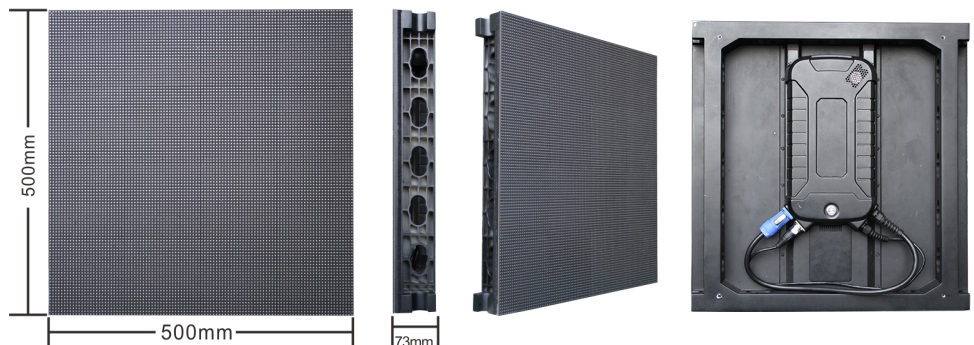


Create flowing curves by using the adjustable ±15 degree curved joiners

### Features



Quick - Lock adjustable ±15 deg.



Quick - Lock Straight Joiner