

LED Panel

Outdoor P10 Panel

PROD CODE
LA - PAP10-50OU

LEDArts





SPECIFICATIONS

Pixel	SMD:RGB Tricol LEDs
Pixel Pitch	10.4mm
Resolution	56 Dots x 56 Dots
Refresh Frequency HZ	3840Hz
LED Life	>100,000 hrs.
Recommended viewing distance	10 - 100mtrs
Viewing Angle (H/V)	H 160° - V 120°
Brightness (cd/m2)	5500±10%
Control System	NOVA Star
Control Options	Via Video Processor (NovaStar recommended)
Data Processor	On board Receiver Card
Data Connection	Cat5 : RJ45 Chassis Mount Connector on Data Input and Data Output
Power Connection	Neutrik PowerCON Chassis Mount Connector on Power Input and Power Output
Power	AC Power 176v - 260v 50/60Hz
Power Consumption	205 watts Max. - 70 watts Average.
Screen Assembly	Quick - Lock System
Dimensions	W 500mm x H 500mm x D 73mm
Weight	6.4kg
IP Rating (Front/Back)	IP65 / IP54 - Outdoor use
Approval	CE Certification, TUV, CCC, ISO


The LEDArts range of Outdoor Panels offer superior design and picture quality with high output that is bright enough for use in daylight conditions. An additional feature on the outdoor panels is the new technology IC drivers that maintain high grayscale even when the brightness has been reduced, which means they can also be used indoors at low levels without any loss of picture quality.

Suitable for Schools,
Sporting events,
Festivals, Concerts
Advertising, TV Stations
Perimeter signage,
Corporate events,
Exhibitions, etc.

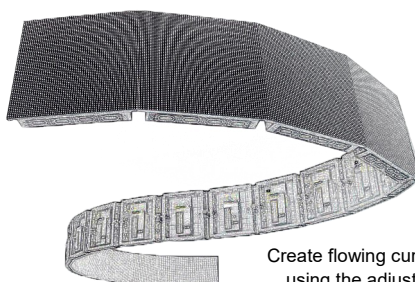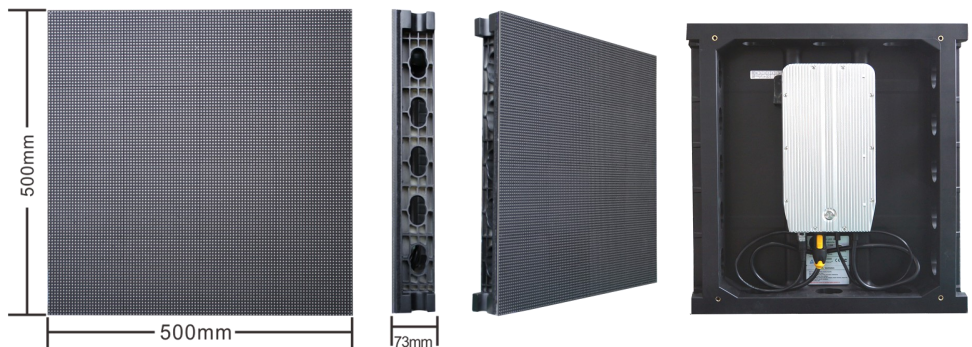


Create flowing curves by using the adjustable ±15 degree curved joiners

Features



Quick - Lock adjustable ±15 deg. Curved Joiner



Quick - Lock Straight Joiner