

LED Panel

Indoor P2 Panel

PROD CODE
LA - PAP2-50IN

LEDArts



SPECIFICATIONS



Pixel	SMD:RGB Tricolor 1515 Black LEDs
Pixel Pitch	2.6mm
Resolution	192 Dots x 192 Dots
Refresh Frequency HZ	≥ 1920Hz
LED Life	>100,000 hrs.
Recommended viewing distance	3 - 100mtrs
Viewing Angle (H/V)	150° / 120°
Brightness (cd/m2)	800 - 1200
Control System	NOVA Star
Control Options	Via Video Processor (NovaStar recommended)
Data Processor	On board Receiver Card
Data Connection	Cat5 : RJ45 Chassis Mount Connector on Data Input and Data Output
Power Connection	Neutrik PowerCON Chassis Mount Connector on Power Input and Power Output
Power	AC Power 90v - 264v 50/60Hz
Power Consumption	130watts Max. - 45watts Average.
Screen Assembly	Quick - Lock System
Dimensions	W 500mm x H 500mm x D 73mm
Weight	6.7 kg
IP Rating (Front/Back)	IP60 / IP50 - Indoor use
Approval	CE Certification, TUV, CCC, ISO

The LEDArts range of indoor Panels offer superior design and picture quality.

Our LED panels are available in a range of pixel pitches that will suit any viewing distance.


The unique cabinet design not only makes this the lightest panel in the world but also gives you the ability to create a variety of screen layouts, making this a very versatile panel indeed.

Suitable for Schools,
Sporting events,
Festivals, Concerts
Advertising, TV Stations
Perimeter signage,
Corporate events,
Exhibitions, etc.

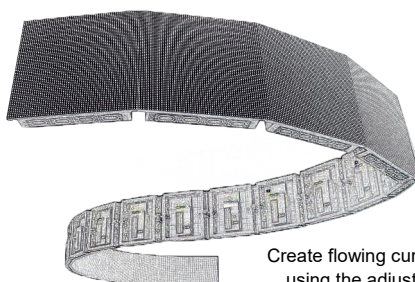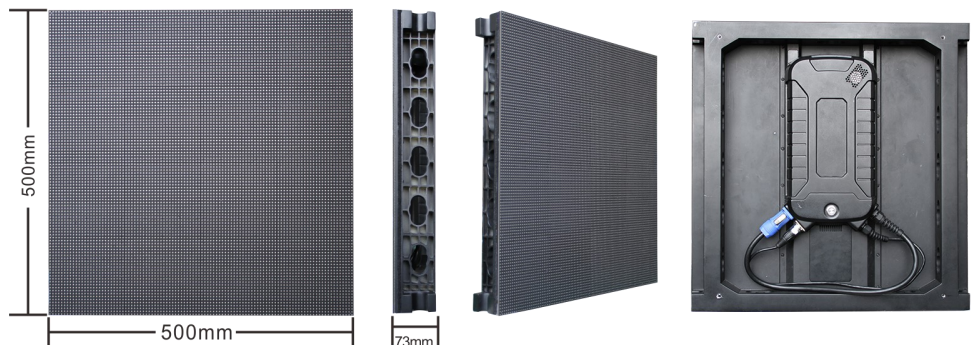


Create flowing curves by using the adjustable ±15 degree curved joiners

Features



Quick - Lock adjustable ±15 deg.



Quick - Lock Straight Joiner