



Arena RGBAL Profile 15-30

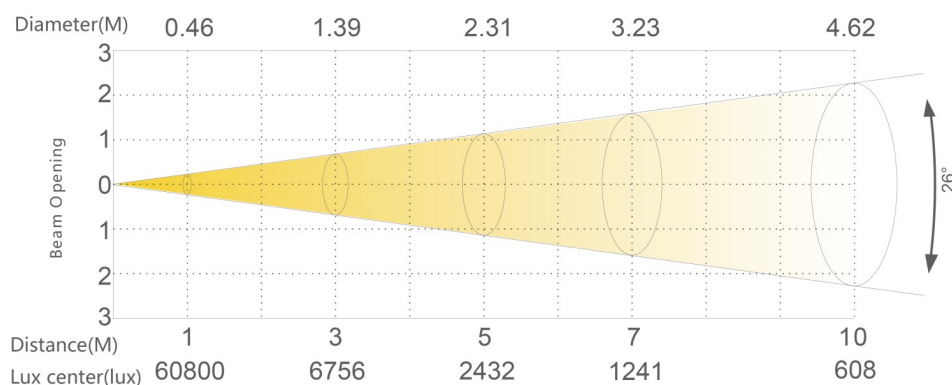

The ARENA 1000 RGBAL is using the innovative 5 colours optic design. It comes with intelligent HSIC colour management system, can easily pick up all colours you need. With precise preset 16 common colours, 2700K-8000K CCT, the perfect dimming curve, and the crystal clear projection, and also it compatible with all our existing popular lenses. The ARENA 1000 RGBLA is designed for all professional show applications.

Light and power supply system			
Voltage	110v -240V/50-60Hz	Strobe	0 - 100% 16 Bit
Power	300W	Average lifespan	20,000 Hours
LED Power	250W (total)	CCT	2700 - 8000 K
Colour System	Red, Green, Blue, Amber, Lime	Gobo size	A & B
Dimmer	0 - 100% 16 Bit	Beam Angle	15 to 30 degree Zoom
Personality	HSIC (8Ch), SDO (6Ch), SIMPLE (8Ch), COLOUR 8 BIT (11Ch), COLOUR 16 BIT (17Ch)		
Appearance parameters			
Structure	Die - cast aluminium	Size	270 x 200 x 855mm
IP Rate	IP20	Net weight	13 Kg

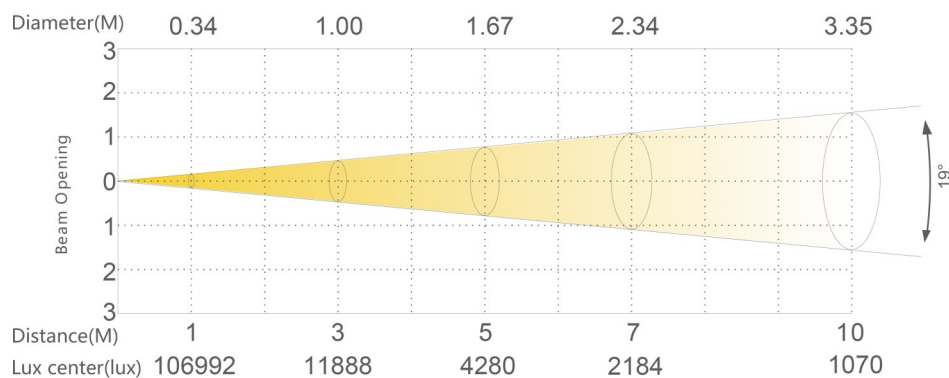

DMX Channel setting

ARENA RGBAL	HSIC 8ch	SIMPLE 8ch	SDO 6ch	Colour 8 Bit 11ch	Colour 16 Bit 17ch	DMX Value	Function
Master Dimmer	1	1	1	1	1	0 > 255	
Hue	2					0 > 255	
Hue Fine	3					0 > 255	
Saturation	4					0 > 255	
Master Dimmer Fine					2	0 > 255	
Red		2		2	3	0 > 255	
Red Fine					4	0 > 255	
Green		3		3	5	0 > 255	
Green					6	0 > 255	
Blue		4		4	7	0 > 255	
Blue Fine					8	0 > 255	
Amber		5		5	9	0 > 255	
Amber Fine					10	0 > 255	
Lime		6		6	11	0 > 255	
Lime Fine					12	0 > 255	
Preset Colours			2	7	13	0 - 10 11 - 20 21 - 30 31 - 40 41 - 50 51 - 60 61 - 70 71 - 80 81 - 90 91 - 100 101 - 110 111 - 120 121 - 130 131 - 140 141 - 150 151 - 160 161 - 170 171 - 255	No function L106 R05 L194 R54 L019 R08 R89 R86 L213 R377 R80 L202 L328 R3314 L101 L768 No function
CCT	5		3	8	14	0 - 10 11 - 30 21 - 50 51 - 70 71 - 90 91 - 110 111 - 130 131 - 150 151 - 170 171 - 190 191 - 210 211 - 230 231 - 255	No function 2700K 3000K 3200K 3500K 4000K 4200K 4500K 5600K 6000K 6500K 7200K 8000K
Strobe	6	7	4	9	15	0 - 9 10 - 99 100 - 109 110 - 179 180 - 189 190 - 255	No function Strobe Slow > Fast (0 - 25 Hz) No function Thunder Strobe No function Random Strobe
Dimmer Speed	7		5	10	16	0 - 9 10 - 29 30 - 69 70 - 129 130 - 189 190 - 255	No function Off Dim 1 Dim 2 Dim 3 Dim 4
Fan Control	8	8	6	11	17	0 - 9 10 - 80 81 - 160 161 - 240 241 - 255	No function Live Studio Power No function